

If you change mainboard on wifi scale, you should do following step to match

1) MATCH

(1) turn on the indicator


input[2013] or [357159]+[TARE] enter setting,press[.] will display as below:

Weight window	Unit window	Total amount
idSet	Fun 10	-SET-

(2) Turn on the base

Remove this sticker, use a metal to connect two pin on signal box

(two pin named SET on mainboard of signal box),light [RF] and [lb] flicker

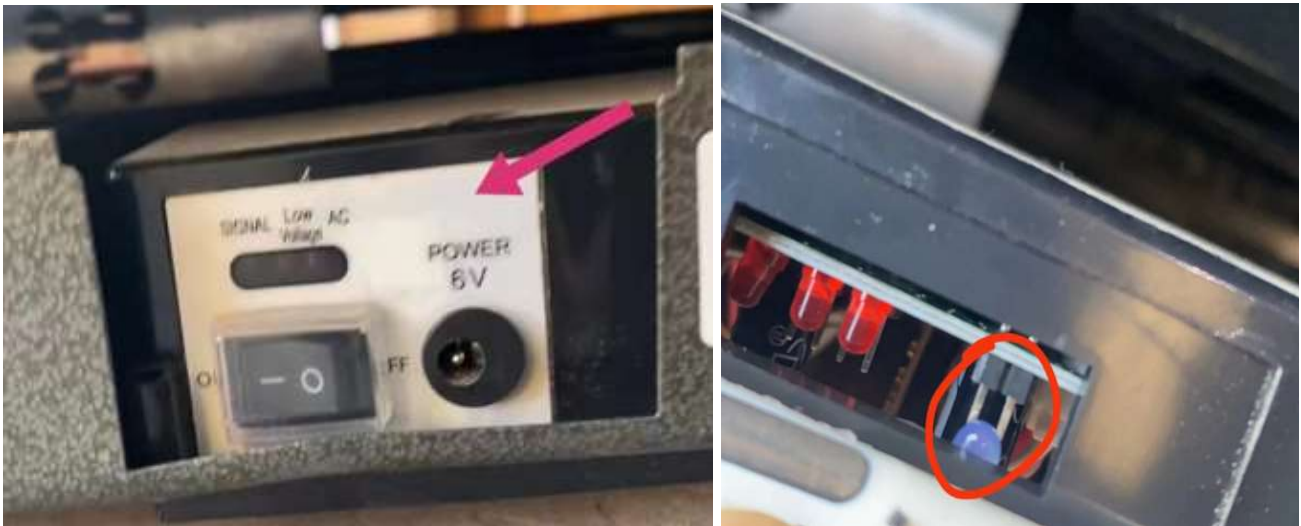

(3) Matching complete

A, now indicator will display as below:

Weight window	Unit window	Total amount
PASS	Fun 10	-SET-

After about 1 second, return to the setting interface.

B, Now the base could turn on again